

PCT


WORLD INTELLECTUAL PROPERTY ORGANIZATION  
International Bureau



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 6 : <b>G08B 13/24, G01V 3/08</b>	<b>A1</b>	(11) International Publication Number: <b>WO 97/29463</b> (43) International Publication Date: 14 August 1997 (14.08.97)
(21) International Application Number: PCT/SE97/00198 (22) International Filing Date: 11 February 1997 (11.02.97) (30) Priority Data: 9600528-5 12 February 1996 (12.02.96) SE (71) Applicant (for all designated States except US): RSO CORPORATION N.V. [NL/NL]; Abraham de Veerstraat 7, P.O. Box 840, Curacao (AN). (72) Inventors; and (75) Inventors/Applicants (for US only): TYRÉN, Carl [SE/FR]; 12, boulevard Albert-1er, F-06600 Antibes (FR). QUINONES, Christian [FR/FR]; Impasse Estour-les-Bancaous, F-83210 Solliès-Pont (FR). (74) Agent: STRÖM, Tore; Ström & Gulliksson AB, P.O. Box 4188, S-203 13 Malmö (SE).		(81) Designated States: CA, JP, US, European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).  Published With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments. In English translation (filed in Swedish).

(54) Title: SENSOR FOR REMOTE DETECTION OF OBJECTS

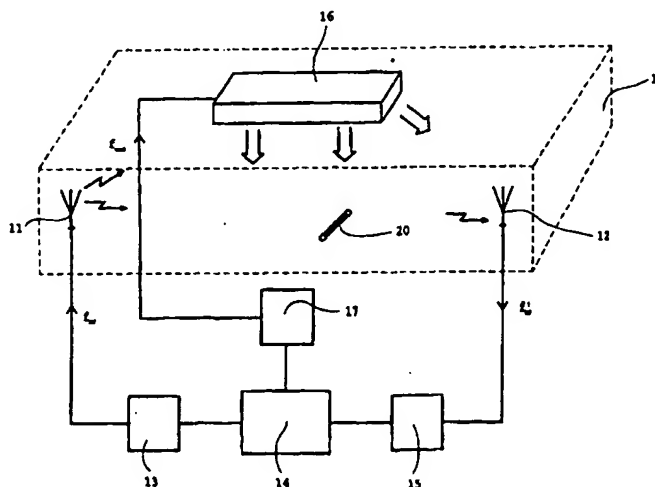

(57) Abstract

A sensor for remote detection of objects in a surveillance zone (10) is preferably intended to be used in an article surveillance zone, which further has at least one transmitter means (11, 13) and at least one receiver means (12, 15) for transmitting and receiving, respectively, electromagnetic radio-frequent signals in the surveillance zone, and at least one modulating means (16) for generating a modulation field in the surveillance zone. The sensor is arranged to transmit an electromagnetic reply signal at the reception of electromagnetic energy from the transmitter means, said reply signal being dependent on the modulation field and being receivable by the receiver means. A magnetic element (23) is arranged in a sensor body (21; 101, 102), the magnetic properties of the element being controllable by a magnetic field acting as the modulation field, wherein the amplitude of the reply signal from the sensor is controllable through the magnetic modulation field.

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AM	Armenia	GB	United Kingdom	MW	Malawi
AT	Austria	GE	Georgia	MX	Mexico
AU	Australia	GN	Guinea	NE	Niger
BB	Barbados	GR	Greece	NL	Netherlands
BE	Belgium	HU	Hungary	NO	Norway
BF	Burkina Faso	IE	Ireland	NZ	New Zealand
BG	Bulgaria	IT	Italy	PL	Poland
BJ	Benin	JP	Japan	PT	Portugal
BR	Brazil	KE	Kenya	RO	Romania
BY	Belarus	KG	Kyrgyzstan	RU	Russian Federation
CA	Canada	KP	Democratic People's Republic of Korea	SD	Sudan
CF	Central African Republic	KR	Republic of Korea	SE	Sweden
CG	Congo	KZ	Kazakhstan	SG	Singapore
CH	Switzerland	LI	Liechtenstein	SI	Slovenia
CI	Côte d'Ivoire	LK	Sri Lanka	SK	Slovakia
CM	Cameroon	LR	Liberia	SN	Senegal
CN	China	LT	Lithuania	SZ	Swaziland
CS	Czechoslovakia	LU	Luxembourg	TD	Chad
CZ	Czech Republic	LV	Latvia	TG	Togo
DE	Germany	MC	Monaco	TJ	Tajikistan
DK	Denmark	MD	Republic of Moldova	TT	Trinidad and Tobago
EE	Estonia	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	UG	Uganda
FI	Finland	MN	Mongolia	US	United States of America
FR	France	MR	Mauritania	UZ	Uzbekistan
GA	Gabon			VN	Viet Nam

**SENSOR FOR REMOTE DETECTION OF OBJECTS****Technical Field**

The present invention relates to a sensor for remote  
5 detection of objects in a surveillance zone, preferably for  
use in an article surveillance system, which further com-  
prises at least one transmitter means and at least one  
receiver means for transmitting and receiving, respec-  
tively, electromagnetic radio-frequent signals in the  
10 surveillance zone, and at least one modulating means for  
generating a modulation field in the surveillance zone,  
said sensor being arranged to transmit an electromagnetic  
reply signal at the reception of electromagnetic energy  
from said transmitter means, and said reply signal being  
15 dependent on said modulation field and being receivable by  
said receiver means.

**Description of the Prior Art**

For many years now a large demand for simple and  
20 still reliable surveillance systems for monitoring objects  
or articles within a given area has been noticed in various  
business and industrial applications. A common example is  
shop antipilferage systems, which are available in many  
different kinds. A simple and inexpensive protection is  
25 obtained by providing articles that are especially liable  
to be stolen (such as clothes) with an antipilferage  
cassette, which is attached to the article. The cassette  
comprises a liquid substance, such as ink, which is  
arranged to discolour the article to make it useless for  
30 normal use, if stolen. In US-A-5 275 122 an exemplary  
cassette is shown, comprising a base portion, a mounting  
pin protruding from the base portion, a pair of liquid-  
filled glass tubes arranged in the base portion and acting  
as an ink ampoule, and a disc mounted below the ink  
35 ampoule. The mounting pin extends between the two glass  
tubes and is connected at a first end to the disc. The

article to be protected from theft is drawn over the mounting pin in the cassette, for instance through a button hole or directly through the fabric, provided that the article in question is an article of clothing. The cassette  
5 is then provided with an upper portion, which is threaded on the mounting pin to secure the article between the base portion and the upper portion. If an unauthorized person tries to remove the cassette upper portion, the disc will impact the fragile ink ampoule through the mounting pin,  
10 wherein the former will break or otherwise start leaking. The cassette upper portion may only be separated from the base portion by means of a certain device, without causing damage to the ink ampoule.

Strictly mechanical theft protections according to  
15 the above have a disadvantage in that even if a potential shoplifter may be discouraged from attempting to steal an article (since the article will possibly be destroyed, if the theft protection is removed), nothing stops the shoplifter from leaving the theft protection untampered on the  
20 article at the actual moment of theft and only later removing the theft protection at an undisturbed location other than the shop premises. This disadvantage may be eliminated by means of electronic article surveillance systems as described below, which may detect the actual  
25 shoplifting attempt - i.e. when the shoplifter tries to bring the article out from the shop premises - and in response thereto generate an alarm signal so as to alert the shop personnel about the attempted theft.

According to a common type of electronic article  
30 surveillance systems each article is provided with a small label, comprising a thin metal strip with magnetic properties. On either side of the shop exit arc-shaped magnetic field generating means are arranged for generating a magnetic field in between. When an article, which has been  
35 provided with an antipilferage label according to the

above, is brought in between the arcs, the metal strip is affected by the magnetic field, and a detectable physical change occurs in the metal strip. Frequently, the fact that an alternating magnetic field will periodically switch the magnetic dipole momentum in the metallic strip is used.  
Alternatively, the metallic strip may be forced into mechanical resonance, provided that the material and dimensions of the strip are chosen accordingly. These physical changes are inductively detected by means of the arcs, wherein an attempted theft may be registered. Since the detection is made by inductive means, antipilferage systems of this kind suffer from a short detection range of a few meters only, requiring the antipilferage arcs to be arranged close to each other and thereby making the shop exit narrow and "unfriendly" for the customers.

In addition, various antipilferage systems of a more advanced type are previously known. For instance, US-A-5 030 940 discloses an electronic article surveillance system. Electronic labels are used for marking and theft-protecting the desired articles. Such an electronic label is of a radio-frequent transponder type and comprises for instance an antenna, a power source such as battery, and a non-linear circuit, for instance some kind of semi-conductor diode. Through its antenna the transponder may receive a first electromagnetic signal of a high frequency, which has been transmitted by a transmitter in the surveillance zone, as well as a second signal of a substantially lower frequency, by means of which an electrostatic field is generated in the surveillance zone. By varying the electrostatic field certain properties of the non-linear circuit are influenced, the most important of which being the electric reactance. These variations in reactance are amplified by the power source. The antenna is connected to the non-linear circuit, and hence a reply signal may be transmitted, which according to the above is composed by

the two signals received. When a modified reply signal is detected as described above by a receiver in the surveillance zone, the system may determine the presence of an article within the surveillance zone and provide a suitable alarm signal as a consequence. A drawback of such transponders is that they require a plurality of components as well as a considerable space and a high price per unit.

Normally, for basic antipilferage applications as described above, it is only desired to determine the presence of a transponder or sensor in a surveillance zone, but not its identity or exact position in the zone. Such determination, however, is of interest in an adjacent technical field, e.g. price labelling of articles. A method and a device for this purpose are disclosed in WO93/14478. A label acting as a sensor or transponder is provided with an antenna and at least one electric resonance circuit, comprising inductive as well as capacitive means; a so-called LC-circuit. The resonance circuit is excited to self-oscillation by means of electromagnetic energy transmitted by an excitation means and received through the antenna of the sensor. By providing the label with an amorphous magnetic element and controlling the permeability of this element by means of an external heterogeneous magnetic bias field, also the resonance frequency of the resonance circuit may be controlled, since the change in permeability for the element will affect the inductive properties of the resonance circuit. Due to the factors above, the frequency of the reply signal transmitted from the resonance circuit is dependent on the magnitude and direction of the magnetic bias field in the position, where the sensor happens to be located. As a consequence, simultaneous detections of a plurality of identical sensors present in the surveillance zone are possible, thanks to the reply signals thereof being separated in the frequency domain through their different magnetic bias levels. Alternatively, a calcula-

tion "backwards" in three dimensions of the position for the sensor is possible by means of the detected frequency value, on condition that the heterogeneous magnetic bias field is known. By arranging a plurality of labels and/or  
5 amorphous magnetic elements in predetermined mutual positions a certain code space may be obtained, wherein the reply signal may for instance represent an article number assigned to the article.

#### 10           **Summary of the Invention**

According to the present invention a sensor for remote detection of objects in a surveillance zone is proposed, where the communication from and to the sensor is electromagnetically performed with a long operating  
15 distance and a wide bandwidth, the output signal from the sensor providing a satisfactory signal strength as well as being possible to control or modulate in a way, which increases the detection accuracy. Additionally, the object of the invention is to provide a sensor, which may be  
20 manufactured from a minimum of components and thus at a very low cost per unit.

The object is achieved by a sensor according to the appended independent patent claim.

#### 25           **Brief Description of the Drawings**

The invention will be closer described in the following, reference being made to the accompanying drawings, in which

FIG 1 schematically illustrates an antipilferage  
30 system, in which a sensor according to the present invention is applied,

FIG 2 is an enlarged sideview of a sensor according to a preferred embodiment of the invention,

FIG 3 is an enlarged sectional view of the sensor according to FIG 2, when viewed from the section III-III in FIG 2,

FIG 4 shows a diagram, which illustrates the results from a first trial, where some parameters are varied for the preferred embodiment of the invention,

FIG 5 shows a diagram, which illustrates the results from a second trial, where some parameters are varied for the preferred embodiment of the invention,

FIGS 6a-6b show a diagram, which illustrates the results from a third trial, where some parameters are varied for the preferred embodiment of the invention,

FIGS 7a-7b show a diagram, which illustrates the results from a fourth trial, where some parameters are varied for the preferred embodiment of the invention,

FIGS 8a-8b show a diagram, which illustrates the results from a fifth trial, where some parameters are varied for the preferred embodiment of the invention,

FIG 9 illustrates an alternative to the preferred embodiment of the invention, illustrating a way of centering an elongated magnetic element within a sensor housing, and

FIG 10 illustrates an alternative embodiment of the invention.

#### Detailed Disclosure of the Invention

In FIG 1 an antipilferage system is illustrated, wherein the sensor according to the present invention may be applied. A transmitter antenna 11 and a receiver antenna 12 are arranged in a surveillance or monitoring zone 10. The transmitter antenna 11 is operatively connected to an output stage 13, which in turn is connected to a controller 14. The output stage 13 comprises various conventional driving and amplifying circuits as well as means for generating a high-frequency electric current  $i_{HF}$ , which will



alternately run back and forth through the transmitter antenna 11 when supplied thereto, thereby generating a high-frequency electromagnetic field at a frequency  $f_{HF}$  around the transmitter antenna. As will be described in more detail below, this electromagnetic field is used for exciting a transponder or sensor 20 present in the surveillance zone 10, said transponder or sensor transmitting an electromagnetic reply signal to be received by the receiver antenna 12, in response to the reception of electromagnetic energy from the transmitter antenna 11.

The receiver antenna 12 is operatively connected to an input stage 15, comprising conventional amplifying and signal-processing means, such as bandpass filters and amplifier circuits. Furthermore, the input stage 15 is connected to the controller 14 and is arranged to forward a signal, which has been received and processed as described below, to said controller 14.

Hence, the transmitter antenna 11 as well as the receiver antenna 12 are arranged for conventional conversion between an electric high-frequency signal and an electromagnetic one. Preferably, the antennas are conventional end-fed or center-fed, half-wave whip antennas, but other conventional antennas may be used just as well.

Additionally, the surveillance zone 10 is provided with a magnetic field-generating means 16, preferably a coil arrangement. In situations where the surveillance zone 10 is a monitored shop exit, the coil arrangement is preferably arranged just below the ceiling level or between ceiling and roof. This arrangement has an aesthetic advantage in that the entire coil arrangement is made less noticeable or even invisible to the shop customers, thereby consequently providing a higher degree of freedom when designing an aesthetically appealing shop exit.

Preferably, the magnetic field-generating means 16 comprises an electric conductor, e.g. copper wire, which is

wound in one turn or a plurality of turns around a coil frame. Preferably, the coil arrangement is essentially formed as a rectangle, which is large enough for covering the whole of the desired surveillance zone, (e.g. the shop exit) by a magnetic modulation field described below. For this reason the dimensions of the coil arrangement with respect to the length and width thereof are in the order of a few meters.

The coil arrangement 16 is connected to the controller 14 via a driving stage 17. The driving stage 17 comprises means for generating a modulating current  $i_{mod}$ , which is fed through the coil for generating a magnetic modulation field  $H_{mod}$  around the coil, the propagation of the field covering substantially the entire surveillance zone 10. The modulating current is given a known variation in amplitude with respect to time according to  $i_{mod}(t)=f(t)$ . In its most basic form the modulating current corresponds to a pure sine waveform according to

$$i_{mod}(t) = A \sin(2\pi f_{mod} t),$$

where  $A$  as usual represents the amplitude of the current and  $f_{mod}$  represents the frequency thereof, but other more complicated mathematic functions are also possible.

When an electric current  $i$  is fed through a straight electric conductor, a magnetic field is generated, the field strength  $H$  of which is linearly dependent on this current according to

$H = i/2\pi r$ , where  $r$  represents the distance to the conductor, and hence the magnetic modulation field  $H_{mod}$  described above will vary in accordance with the modulating current  $i_{mod}$ .

In FIGs 2 and 3 a sensor 20 according to a preferred embodiment of the invention is shown. A sensor body 21 constitutes a housing for the sensor, but it also takes active part in the actual sensor function, as will be described in more detail below. The sensor body 21 consists

of a material with dielectric properties, where the relative dielectric constant or permittivity  $\epsilon_r$  is larger than that of air ( $=1$ ). According to the preferred embodiment the sensor body is formed as a cylinder with  
5 walls made from glass or a similar material, such as a composite material consisting of glass fibre and resin, but other materials, e.g. plastic material, are possible too. The sensor body 21 is sealed at both ends (either directly sealed by melting the glass material, or by separate plugs  
10 22a, 22b) according to FIG 2.

A wire-shaped element 23 of amorphous magnetic material is arranged inside the sensor body in the longitudinal direction of the latter. The element 23 is surrounded by a dielectric liquid, which entirely or partly fills up the  
15 cylinder-shaped cavity inside the sensor body 21. The liquid has a high dielectric constant. In the preferred embodiment the liquid is ink or another heavily coloured liquid of the kind, which is already used in conventional antipilferage ampoules, as described above in section  
20 "Description of the Prior Art". An advantage of the invention is in fact that the sensor may have a conventional "discolouring function" in addition to the radio-frequent transponder function described below. In such applications the sensor body is formed according to the prior art (see  
25 for instance US-A-5 275 122) as an ink-filled glass ampoule with means for breaking the glass, when the sensor is removed from the article by an unauthorized person. A double protection against theft is hereby obtained, since such a sensor arrangement will protect a) the sensor as a whole  
30 (if the sensor is removed from the article, the article will be discoloured) and b) the electromagnetic sensor function (the wire-shaped element cannot be removed without breaking the sensor glass and creating a discolouration of the protected article). The liquid-based surroundings of  
35 the wire-shaped element have the additional and quite

positive effect that the signal strength of a reply signal transmitted from the sensor will be substantially increased (by several dB), as compared to a case without liquid.

Even if the liquid according to above has been  
5 described as ink or another coloured liquid, plain water ( $\epsilon_r \approx 80$ ), an alcohol-based liquid ( $\epsilon_r \approx 60$ ) or essentially any liquid, preferably with dipole properties, may be used as well.

According to the preferred embodiment of the inven-  
10 tion the wire-shaped element 23 is made from the amorphous cobalt-rich alloy  $\text{Co}_{68.1}\text{Fe}_{4.4}\text{Si}_{12.5}\text{B}_{15}$ , but other alloys, which fulfill the functional demands described below, are possible too. One possible alternative alloy is  $\text{Co}_{70.5}\text{Fe}_{4.5}\text{Si}_{15}\text{B}_{10}$ . Both these alloys are more or less  
15 completely free from magnetostriction, meaning that they are not likely to convert magnetic energy to mechanical energy, thereby avoiding the risk of undesired mechanical resonance phenomena.

The wire-shaped element is electrically conductive,  
20 and the physical dimensions thereof are adjusted for optimum antenna function, as described below. According to the preferred embodiment the diameter of the element is 124  $\mu\text{m}$  and the length is 60-65 mm. Furthermore, the amorphous material of the element exhibits magnetic properties, and  
25 an essential feature is that the permeability of the material may be controlled under the influence from an external magnetic field. This controllable permeability is used in two different ways according to the invention; for controlling the amplitude of an electromagnetic reply  
30 signal from the sensor, and for controlling the frequency of the reply signal.

When a sensor 20 present in the surveillance zone 10 is exposed to the electromagnetic excitation field with frequency  $f_{HF}$  transmitted by the transmitter antenna 11,  
35 the wire-shaped element 23 operates as an antenna. An

electric current  $i_{element}$  is induced in the wire-shaped element, provided that the length of the element is adjusted to the frequency  $f_{HF}$  - or rather to the corresponding wavelength - of the received high-frequency excitation signal.

5 An element length of 60-65 mm requires a frequency  $f_{HF}$  within the radio-frequent range, preferably between 500-900 MHz. Also the dielectric environment (the liquid combined with the glass material of the sensor body) around the wire-shaped element is important in this respect. The

10 dielectric environment causes a reduction in the speed of light  $c$  as compared to the speed of light in vacuum, wherein the length of the antenna is virtually increased for the sensor. The dielectric environment also provides for an improved reception of an incoming electromagnetic signal,

15 since the dipolar properties of the dielectric environment amplifies the electric component of the incident electromagnetic field.

Thus, the induced current  $i_{element}$  runs back and forth through the element 23 at a frequency  $f_{element} = f_{HF}$ . This

20 alternating current causes the generation of an electromagnetic field around the element 23, said field propagating through the surveillance zone 10 and reaching the receiver antenna 12 as a reply signal, the receiver antenna then receiving and forwarding the signal to the controller 14 as

25 an indication of the presence of a sensor in the surveillance zone 10. Consequently, the wire-shaped element 23 has the simultaneous functions of a receiver of the electromagnetic excitation signal as well as a transmitter of the electromagnetic reply signal. However, since the

30 signals are of the same frequency, they would not be possible to separate from each other, if the measures below had not been taken.

As described above, by the magnetic modulation field  $H_{mod}$  the permeability  $\mu_r$  of the wire-shaped element material

35 may be controlled. According to the preferred embodiment

$H_{mod}$  varies sinusoidally at the frequency  $f_{mod} = 500$  Hz. However, other frequencies are equally possible within a low-frequency range up to at least 1000 Hz.

Now, the amplitude of the reply signal may be controlled by the so called giant-magnetoimpedance effect or skin-depth effect in the amorphous magnetic material of the element. This effect, which has been described in the report "Giant magnetoimpedance and magneto-inductive effects in amorphous alloys" in "J. Appl. Phys. Vol. 76, No. 10, 15 November 1994" may be summarized according to the simplified model below.

It is a well-known fact that the effective sectional conducting area  $A_{eff}$  in an electric conductor is reduced when the frequency is increased (so called skin-depth effect).  $A_{eff}$ , having a strictly circular shape at DC (the conducting electrons flow everywhere in the conductor), will at high frequencies resemble a ring of a certain width  $\epsilon$ . The reason for this is, among others, that eddy currents are generated in the interior of the conductor, said eddy currents restricting the availability for the conducting electrons. The width  $\epsilon$  of the effective conductive area  $A_{eff}$  may be expressed according to

$$\epsilon = \sqrt{\frac{\rho}{\pi \cdot \mu \cdot f}},$$

where  $\rho$  represents the resistivity of the conductive material,  $\mu$  represents the permeability thereof, and  $f$  represents the frequency. From

$$R = \frac{\rho}{\epsilon}$$

the following is obtained

$$R = \sqrt{\pi \cdot \mu \cdot f \cdot \rho},$$

i.e. the resistance  $R$  is a function of  $\mu$  and  $f$ .  
Through the  $\mu$ -dependence of the resistance the amplitude of the current through the conductor will change as a function of  $\mu$ .

5        If the model above is applied to the wire-shaped element in the sensor according to the present invention, it is readily realized that the amplitude of the current  $i_{\text{element}}$  varies in accordance with the variations in the magnetic modulation field  $H_{\text{mod}}$ , which according to the above  
10 controls the permeability  $\mu_r$  of the element. As a consequence, the electromagnetic reply signal transmitted from the element 23 and the sensor 20 will be constituted by a signal, the amplitude of which is modulated by the frequency  $f_{\text{mod}}$  and the carrier frequency of which is  $f_{\text{HP}}$ .  
15 This amplitude-modulated signal will then be demodulated in a conventional way by the input stage 15. The additional information provided by the amplitude-modulation may be used by the controller for improving the accuracy of the detection; i.e. for minimizing the number of sensors which  
20 avoid detection in the surveillance zone, but also for minimizing the risk of false alarms, when a sensor is located outside the surveillance zone but still replies to an incoming excitation signal.

As mentioned above, also the frequency of the reply  
25 signal may be controlled by the magnetic modulation field. According to the preferred embodiment of the invention the sensor forms an electric resonance circuit, which may be functionally compared to the LC-circuit described in WO93/14478. The dielectric environment around the wire-  
30 shaped element 23 (the sensor body 21 and/or the liquid 24) provides the capacitive properties of the circuit, while the inductive properties are provided by the element 23 itself, which operates as an antenna at the same time. According to the above the element permeability  $\mu_r$  depends  
35 on the magnitude of the magnetic modulation field  $H_{\text{mod}}$ , and

since  $L = f(\mu_r)$  and the resonance frequency  $f_{res} = F(L)$ , the value of  $f_{res}$  will vary, when the sensor is supplied with electromagnetic energy from the excitation signal, while simultaneously being affected by the magnetic modulation field  $H_{mod}$ . In other words an electromagnetic reply signal is obtained, the frequency of which is modulated by the frequency  $f_{mod}$  and the carrier frequency of which is  $f_{HF}$ . As described above for the amplitude modulation, a received frequency-modulated reply signal will be demodulated by the input stage 15, before the signal is forwarded to the controller 14.

By performing trials various variations of the sensor according to the described embodiment have been studied. The trial results, which are illustrated as diagrams in FIGs 4-8b, will now be discussed.

FIG 4 discloses a diagram from a trial, where the received signal strength (in dB) was studied, when the length of the wire-shaped element was varied in steps of 5 mm for different outer diameters  $\Phi_{ext}$  and inner diameters  $\Phi_{int}$ , respectively, of the cylinder-shaped sensor body 21, and for different choices of material for the sensor body. The legend in the drawing indicates the variants, to which the different graphs are related. The cylinder-length is constantly 75 mm, and the cylinder is completely filled with water. The wire-shaped element is made from the alloy  $Co_{68.1}Fe_{4.4}Si_{12.5}B_{15}$  and is freely arranged inside the cylinder 21. The sensor 20 is excited at a constant frequency  $f_{HF}$  within the 500-600 MHz range. One variation consists in that a thin cylinder is placed inside a thicker cylinder, but this apparently gives a weaker signal, than if the thicker cylinder was used alone. The best result (the strongest signal) is achieved when  $\Phi_{ext} = 7$  mm.

FIG 5 shows the results from a trial, where the length of the element is constantly 65 mm and where a cylinder with a length of 100 mm is filled with water up to



65 mm. The outer diameter  $\Phi_{ext}$  of the cylinder was varied between 3 mm and 24 mm. Apart from this, the conditions correspond to the ones in the previous drawing.

In FIGs 6a and 6b the length of the element is constantly 65 mm, and the length of the cylinder is constantly 100 mm. The water level is varied inside the cylinder, and so is the cylinder outer diameter. It appears from the graphs that the best result is achieved for  $\Phi_{ext} = 8$  mm and a water level of 100 mm (completely filled cylinder).

The element length is constantly 65 mm and the cylinder length is constantly 100 mm also in FIGs 7a and 7b. Here the excitation frequency  $f_{HF}$  is varied, and so are the cylinder outer diameter and the water level. In FIG 7a the water level is 65 mm, while it is 100 mm in FIG 7b. It appears from the graphs that the signal reaches optimum at different cylinder outer diameters for different excitation frequencies.

According to FIG 8a the element length is constantly 65 mm, the cylinder length is constantly 100 mm, the water level is 70 mm,  $f_{HF} = 638$  MHz and  $f_{mod} = 522$  Hz. The cylinder outer diameter and the cylinder thickness are varied. The thinnest thickness of material gives the strongest signal. Furthermore, it is noticed that the signal gets weaker, if the cylinder outer diameter is chosen too large.

The same conditions applies for FIG 8b as in FIG 8a, apart from the water level now being a full 100 mm. The results from the previous drawing are here confirmed.

From the trial results described above, and from other trial results, the conclusion may be drawn, that an optimum design is achieved, if the following conditions are fulfilled:

- the cylinder is completely filled with liquid,
- the wire is arranged in the center of the cylinder,
- $\Phi_{ext} \approx 6-7$  mm,

- the difference  $\Phi_{ext} - \Phi_{int}$  is as small as possible,
- the wire has a maximum length with respect to the length of the cylinder, and
- 5     • the  $\epsilon_r$ -value of the liquid is as high as possible.

Furthermore, it appears from the trial results, FIGs 7a and 7b in particular, that the sensor is fully operational within a broadband frequency spectrum of at least a few hundred MHz, thereby making the sensor relatively insensible to changes in the excitation frequency. This is a considerable advantage compared to previously known sensor types, since the manufacturing will be simplified, as the need is eliminated for a precise tuning of the resonance or reply frequency.

Additionally, the sensor has proven to be operational at a distance of the order of 10 m, and this too is a substantial advantage compared to previously known sensor types (cf. the section "Description of the Prior Art" above).

A further advantage of a sensor design according to the above is that it enables a very simple manufacturing process. Basically, one simply has to provide the glass ampoule 21 with its liquid 24, insert the wire-shaped element 23 and then seal or close the glass ampoule. Apparently, such a sensor may be manufactured at a very low price per unit.

As mentioned above trials have proven, that the reply signal will be strongest, if the wire-shaped element is firmly mounted in the center of the cylinder along the cylinder axis. Such fixed arrangement may according to FIG 9 be provided by arranging a number of circular discs 91 at regular intervals with respect to each other firmly and perpendicularly against the inner surface of the cylinder. A small opening is made in each disc, wherein the diameter

of the opening only slightly exceeds the thickness of the wire-shaped element. By inserting the element through the opening the element may be held in place due to the frictional engagement between the element and the inside of the  
5 respective opening.

Alternatively, amorphous materials of a so-called stress-annealed kind may be used. This means that the wire-shaped element has been annealed when manufactured under the influence from a tensional force along the main axis of  
10 the element. Through the annealing the element will maintain a perfect stiffness and straightness, once the annealing has finished. By carefully adjusting the length of such an element so that the element will precisely fit between the inner sides of the cylinder ends, the element  
15 will be maintained in a centered position through the stiffness of the element, as desired.

Furthermore, the wire-shaped element may be made by so-called flash-annealing, wherein an electric current is fed through the element for a certain time, said electric  
20 current generating heat as well as a magnetic field around the element suitable for creating optimum domain structures.

According to a variant of the preferred embodiment of the invention also the liquid-based dielectric environment  
25 24 around the wire-shaped element 23 is given magnetic properties. Preferably, this is achieved by adding a highly fine-grained ferromagnetic or paramagnetic material to the liquid and suspending the mixture so as to obtain a colloidal solution. The dissolved magnetic particles are  
30 prevented from sedimentation on the bottom of the cylinder 21 by adding any stabilizer known per se. Such liquids with magnetic properties are commonly referred to as ferrofluids and are well-known within several technical fields, therefore not requiring any detailed description herein.  
35 However, it may be noticed that water-based as well oil-

based ferrofluids may be used together with the present invention.

By creating surroundings or an environment for the wire-shaped element 23 as described above, where the environment has not only dielectric properties but also magnetic properties, the following positive effect is obtained. The magnitude of the magnetic modulation field decreases rapidly with the distance from the coil arrangement 16. If a sensor 20 is located in the outmost region of the intended detection zone, there is an apparent risk of the modulation of the sensor reply signal becoming too weak for detection. However, the microscopic magnetic particles in the liquid 24 will all be oriented according to the incident magnetic modulation field due to their dipolar magnetic properties (even if the magnetic modulation field is very weak), and each individual particle contributes to a slight increase in field strength in each respective position. All small contributions are added to the incident modulation field, thereby considerably increasing the field strength in the center of the sensor, i.e. where the wire-shaped element 23 is located. Trials have proven that a weak magnetic modulation field may be amplified at least a hundred times by using a liquid with magnetic properties according to the above.

According to an alternative embodiment of the invention another kind of magnetic sensor element is used, namely a multi-layer type of element. Such an element does not have to be wire-shaped, i.e. have a circular cross section, but is preferably given a substantially flat cross section. The physical effect used according to this embodiment is the so-called magneto-resistance, which is thoroughly described in for instance the article "Giant magneto-resistance in spin-valve multilayers", B. Dieny ("Journal of Magnetism and Magnetic Materials 136, 1994, 335-359"). The resistance  $R$  of such a material depends on

the resistivity  $\rho_r$  of the material, which in turn depends on a magnetizing field strength  $H$ . Thus,  $R = f(\rho_r(H))$ , wherein a modulation in amplitude according to the one described above may be achieved.

5        According to a second alternative embodiment the dielectric environment around the sensor element 23 is completely made up of a solid material, which forms the sensor body 21 at the same time. According to FIG 10 this sensor body is formed by two rectangular plates 101, 102,  
10        which are arranged on top each other with the wire-shaped element 23 arranged in between. The dielectric plates may preferably be realized from a highly dielectric material, which today is used in GPS-antennas of so-called patch antenna type and which is available from Trans-Tech, Inc.,  
15        Adamstown, MD, USA and is described in the publication No. 50040100 from this company. Examples of such materials are barium tetratitanate or nickel-aluminium titanate. Alternatively, the sensor body may be formed as one homogeneous element made from the material above, wherein a recess will  
20        be formed in the center of the sensor body extending along the longitudinal axis of the sensor. The wire-shaped element 23 is arranged in this recess. Functionally, the sensor according to this alternative embodiment corresponds fully to the embodiments described above, where the  
25        environment consists of a dielectric liquid.

      The descriptions above of the various embodiments of the invention are to be taken as embodiment examples only. Other embodiments may deviate from the ones described above within the scope of the invention, as defined in the appended patent claims. For instance, the sensor body 21 may not  
30        necessarily have to be formed as a cylinder but instead have for instance a polygonal-shaped cross-section. Furthermore, the sensor body and the liquid inside the sensor body are not both required to have dielectric  
35        properties. Additionally, the liquid may be omitted, even

if this is not considered suitable at the moment with  
respect to the signal properties. The sensor element may be  
given other forms than the ones described above, and the  
element material may consist of any material which fulfills  
5 the functional demands according to the claims and descrip-  
tion.

## CLAIMS

1. A sensor for remote detection of objects in a surveillance zone (10), preferably for use in an article surveillance system, which further comprises at least one transmitter means (11, 13) and at least one receiver means (12, 15) for transmitting and receiving, respectively, electromagnetic radio-frequent signals in the surveillance zone, and at least one modulating means (16) for generating a modulation field in the surveillance zone, said sensor being arranged to transmit an electromagnetic reply signal at the reception of electromagnetic energy from said transmitter means, and said reply signal being dependent on said modulation field and being receivable by said receiver means, c h a r a c t e r i z e d by

15 a magnetic element (23) arranged in a sensor body (21; 101, 102), the magnetic properties of said element being controllable by a magnetic field acting as said modulation field, and the amplitude of the reply signal from the sensor being controllable by said magnetic modulation field.

2. A sensor according to claim 1, c h a r a c t e r i z e d in that also the frequency of the reply signal from the sensor is controllable by said magnetic modulation field.

3. A sensor according to claim 1, c h a r a c t e r i z e d in that the magnetic element (23) is made from an amorphous cobalt-rich alloy.

30

4. A sensor according to claim 3, c h a r a c t e r i z e d in that the amorphous alloy is made from any of the alloys  $\text{Co}_{68.1}\text{Fe}_{4.4}\text{Si}_{12.5}\text{B}_{15}$  or  $\text{Co}_{70.5}\text{Fe}_{4.5}\text{Si}_{15}\text{B}_{10}$ .

5. A sensor according to any preceding claim,  
c h a r a c t e r i z e d in that the magnetic element  
(23) is wire-shaped.

5 6. A sensor according to claim 5,  
c h a r a c t e r i z e d in that the wire-shaped magnetic  
element (23) is manufactured by so-called flash-annealing.

7. A sensor according to any preceding claim,  
10 c h a r a c t e r i z e d in that the magnetic element  
(23) is contained in an environment (24; 101, 102), con-  
sisting of at least one dielectric material, the relative  
dielectric constant or permittivity  $\epsilon_r$  of which is larger  
than that of air.

15 8. A sensor according to claim 7,  
c h a r a c t e r i z e d in that the dielectric environ-  
ment (24) is liquid-based around the magnetic element (23).

20 9. A sensor according to claim 8,  
c h a r a c t e r i z e d in that the liquid-based  
environment (24) around the magnetic element (23) at least  
partly consists of water, ink, alcohol, or any other liquid  
with a relative dielectric constant or permittivity  $\epsilon_r$ ,  
25 exceeding 40, or consists of any combination of such  
liquids.

10. A sensor according to claim 8 or 9,  
c h a r a c t e r i z e d in that the liquid-based  
30 environment (24) is limited by a cylinder (21), which is  
sealed at either ends (22a, 22b) and acts as a sensor body.

11. A sensor according to claim 10,  
c h a r a c t e r i z e d in that the cylinder (21)  
35 comprises glass or a material similar to glass, the



relative dielectric constant or permittivity  $\epsilon_r$  of which is at least one order of magnitude larger than that of air.

12. A sensor according to claim 10 or 11,  
5 c h a r a c t e r i z e d by the magnetic element (23) being arranged in the center of the cylinder (21) along its longitudinal axis.

13. A sensor according to claim 10 or 11,  
10 c h a r a c t e r i z e d in that the magnetic element (23) is arranged in a close vicinity of the inner surface of the cylinder (21) along a direction, which is essentially parallel to the longitudinal axis of the cylinder.

14. A sensor according to claim 12,  
15 c h a r a c t e r i z e d by a plurality of disc-shaped means (91), which are arranged in spatial relationships with respect to each other inside the cylinder (21) in perpendicular connection to the inner surface of the  
20 cylinder, and the outer diameter of which correspond to the inner diameter of the cylinder, an opening being formed in the center of each disc-shaped means for receiving and fixing the magnetic element (23).

15. A sensor according to claim 12,  
25 c h a r a c t e r i z e d by the magnetic element (23) being an amorphous wire of a kind, which when manufactured is heat-treated or annealed under tension in the longitudinal direction.

30 16. A sensor according to any of claims 8-15, c h a r a c t e r i z e d in that the liquid-based environment (24) of the magnetic element (23) in addition comprises suspended or dissolved particles with magnetic  
35 properties.

17. A sensor according to claim 16,  
c h a r a c t e r i z e d in that the liquid-based  
environment (24) of the magnetic element (23) at least  
5 partly is a ferrofluid.

18. A sensor according to any of claims 1-7,  
c h a r a c t e r i z e d by a substantially homogeneous  
sensor body, which is made from a solid dielectric mate-  
10 rial,

and a recess formed in the center of the sensor body  
in parallel to the longitudinal axis of the sensor, the  
magnetic element (23) being arranged in the recess.

19. A sensor according to any of claims 1-7,  
c h a r a c t e r i z e d by at least two essentially  
parallel-epipedic plates (101, 102), which are put together  
for forming the sensor body and which are arranged to fix  
the magnetic element (23) in between and in the longitudi-  
20 nal direction of the sensor.


20. A sensor according to any preceding claim,  
c h a r a c t e r i z e d in that the sensor is arranged  
to receive an electromagnetic first signal within a first  
25 frequency range  $\Delta f_1$ , to receive a magnetic second signal  
with a second frequency range  $\Delta f_2$ , where  $\Delta f_1 \gg \Delta f_2$ , and to  
transmit an electromagnetic reply signal composed by the  
first signal, the amplitude of which is modulated by the  
second signal.

21. A sensor according to any preceding claim,  
c h a r a c t e r i z e d in that the sensor is arranged  
to receive an electromagnetic first signal within a first  
frequency range  $\Delta f_1$ , to receive a magnetic second signal  
35 with a second frequency range  $\Delta f_2$ , where  $\Delta f_1 \gg \Delta f_2$ , and to

transmit an electromagnetic reply signal composed by the first signal, the frequency of which is modulated by the second signal.


- 5           22. A sensor according to any preceding claim,  
c h a r a c t e r i z e d by the magnetic element (23) .  
being made from such a magnetic material, that the  
amplitude of the electromagnetic reply signal transmitted  
from the sensor is controllable through giant-magneto-  
10 impedance effects and/or giant-magnetoresistance effects in  
the material, when the sensor is exposed to said magnetic  
modulation field in the surveillance zone (10) .

FIG 1

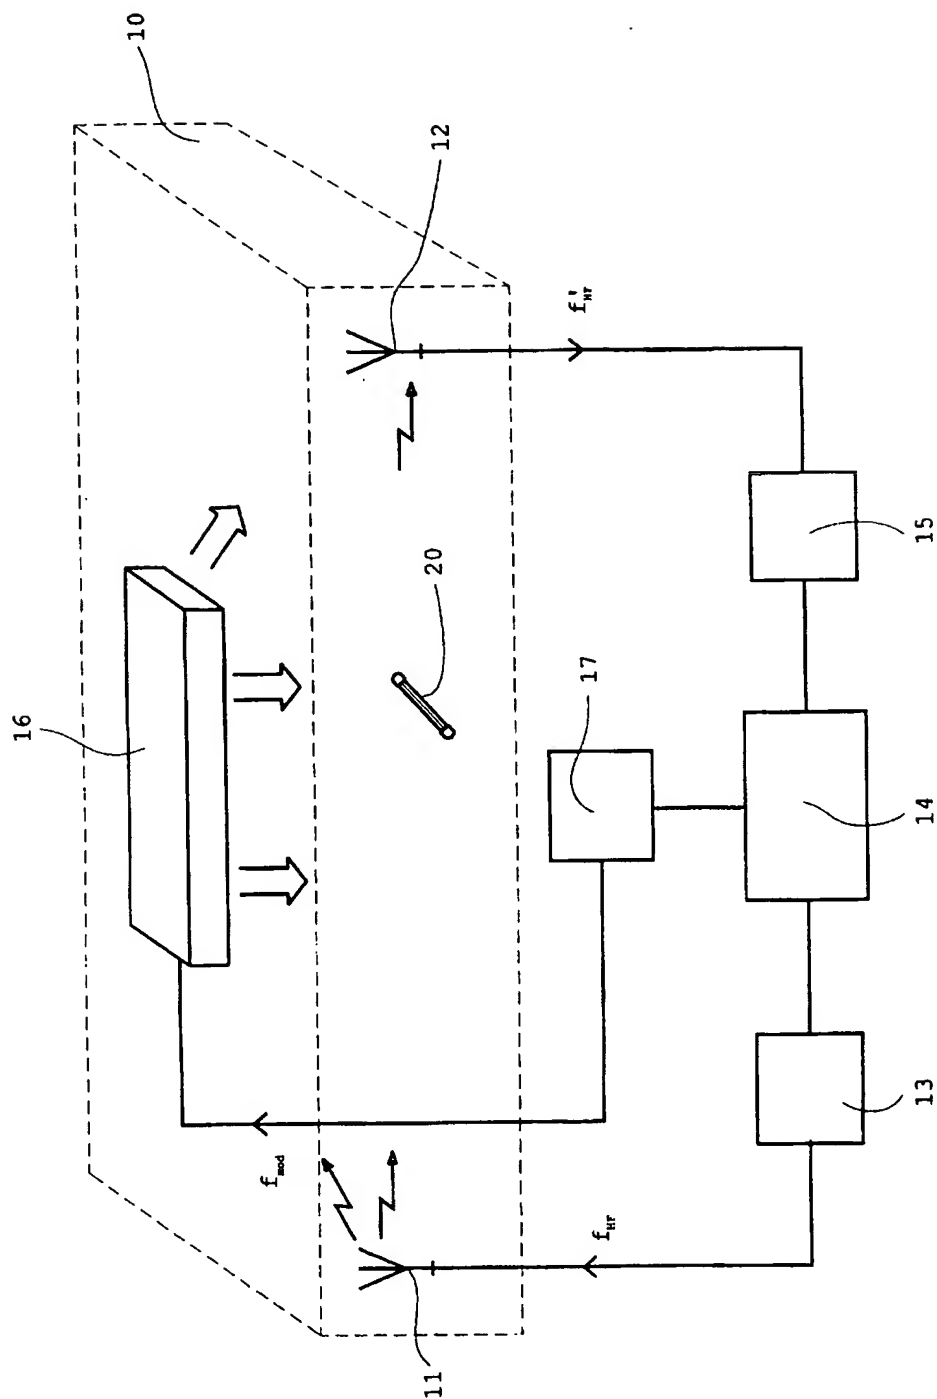

2/11


FIG 3

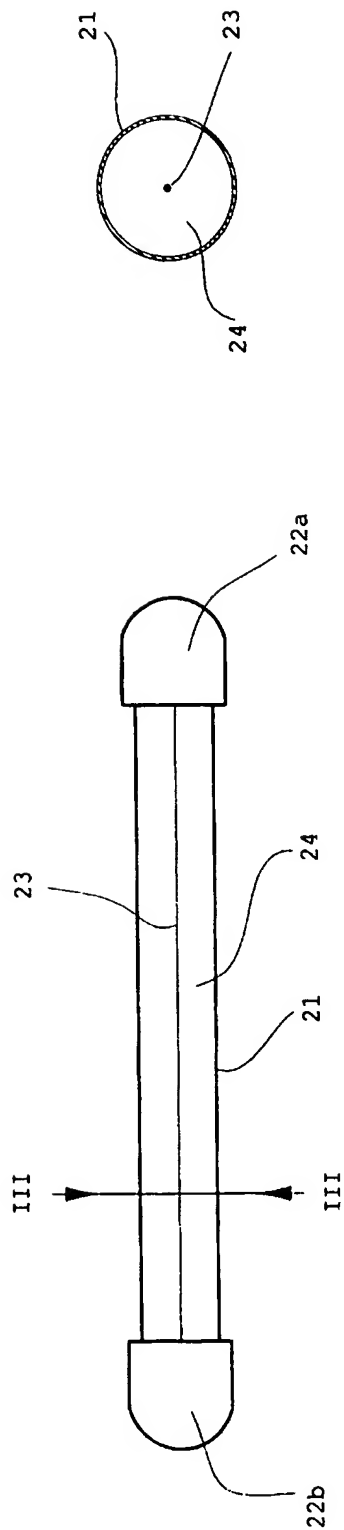

3/11


**Fig 4**

Signal strength [dB]

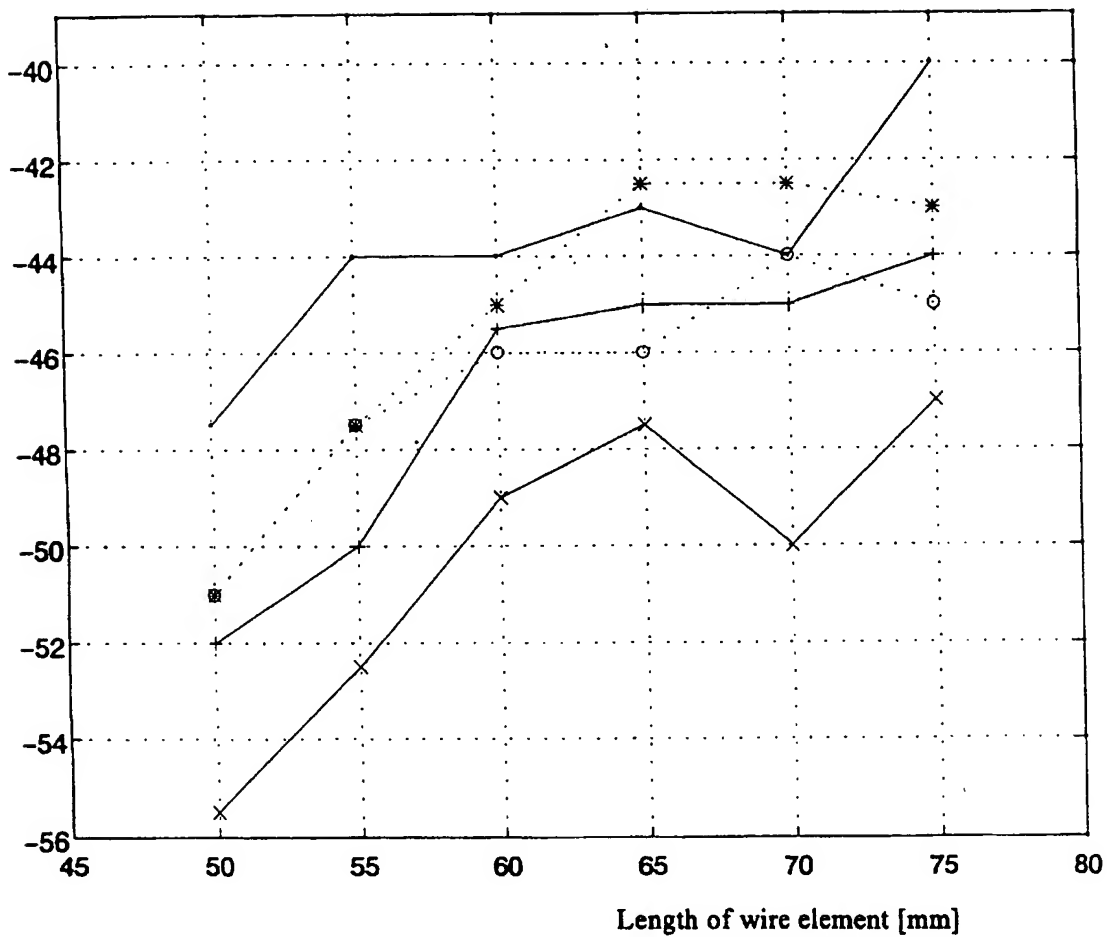


- Glass cylinder,  $\Phi_{ext} = 7$  mm,  $\Phi_{int} = 5,3$  mm
- \* Composite cylinder,  $\Phi_{ext} = 7$  mm,  $\Phi_{int} = 4,8$  mm
- + Glass cylinder ( $\Phi_{ext} = 5$  mm,  $\Phi_{int} = 3,7$  mm) inside another glass cylinder ( $\Phi_{ext} = 7$  mm,  $\Phi_{int} = 5,3$  mm)
- Glass cylinder,  $\Phi_{ext} = 6$  mm,  $\Phi_{int} = 4$  mm
- x Glass cylinder,  $\Phi_{ext} = 5$  mm,  $\Phi_{int} = 3,7$  mm

4/11

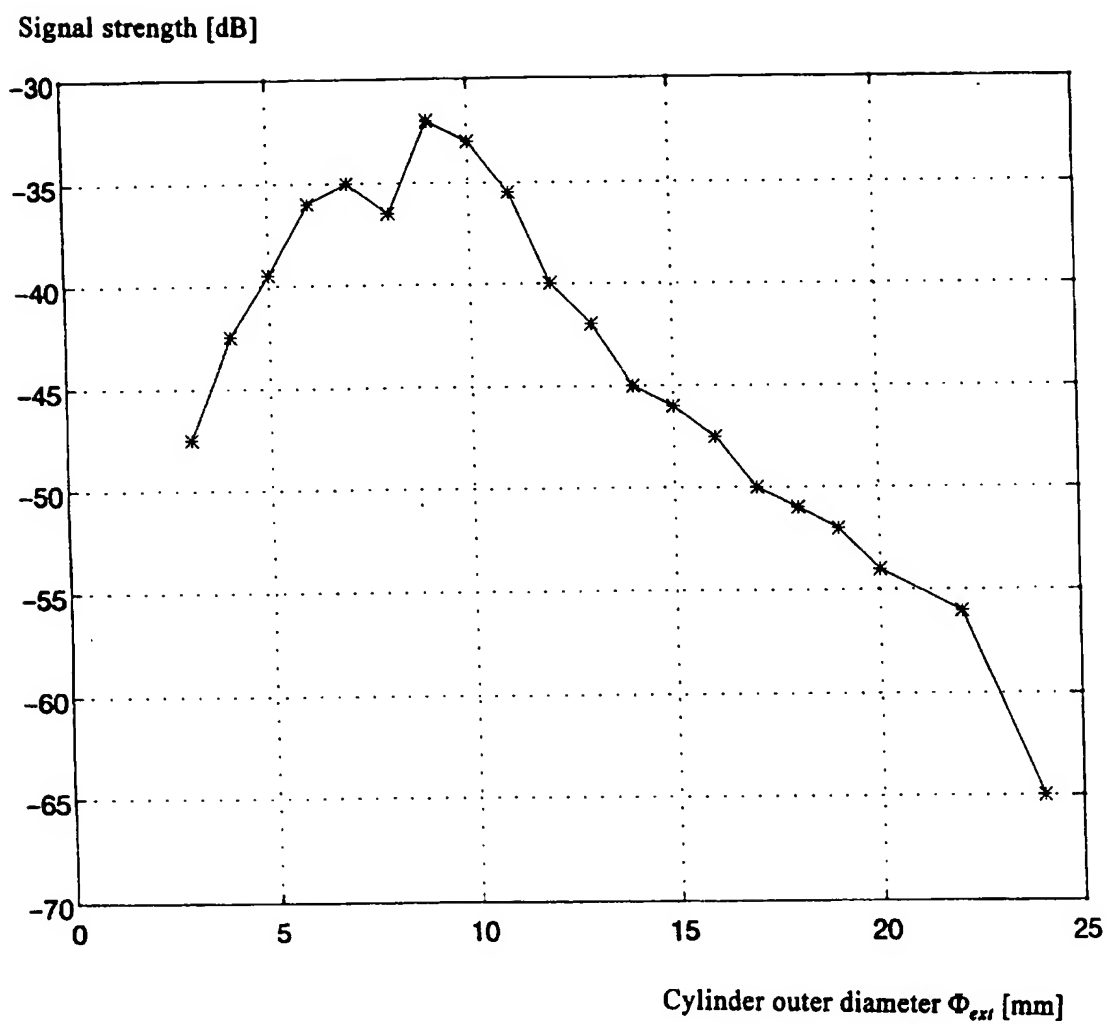**Fig 5**

5/11

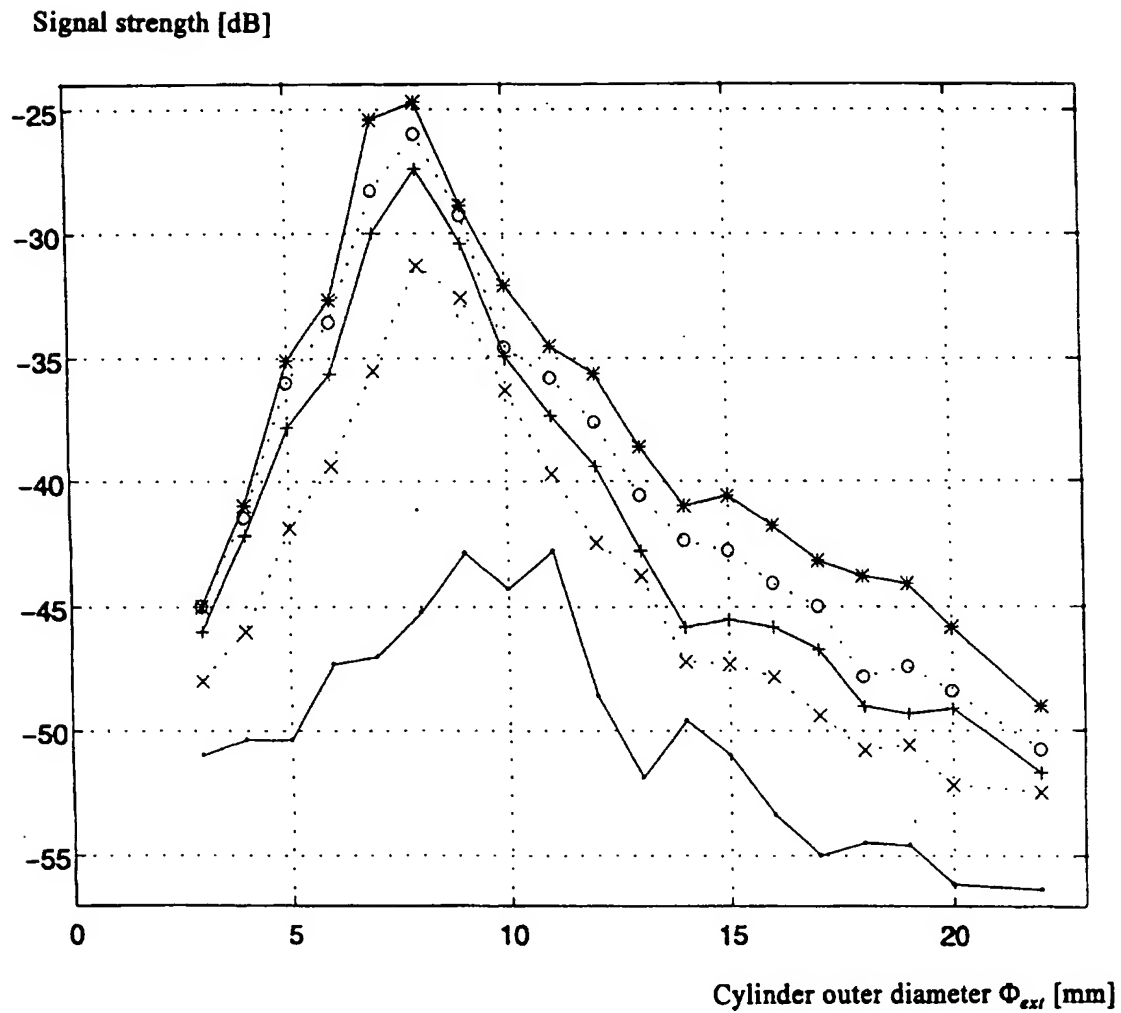**Fig 6a**


- Liquid level = 40 mm
- x Liquid level = 65 mm
- + Liquid level = 75 mm
- o Liquid level = 85 mm
- \* Liquid level = 100 mm



6/11

Fig 6b

Signal strength [dB]

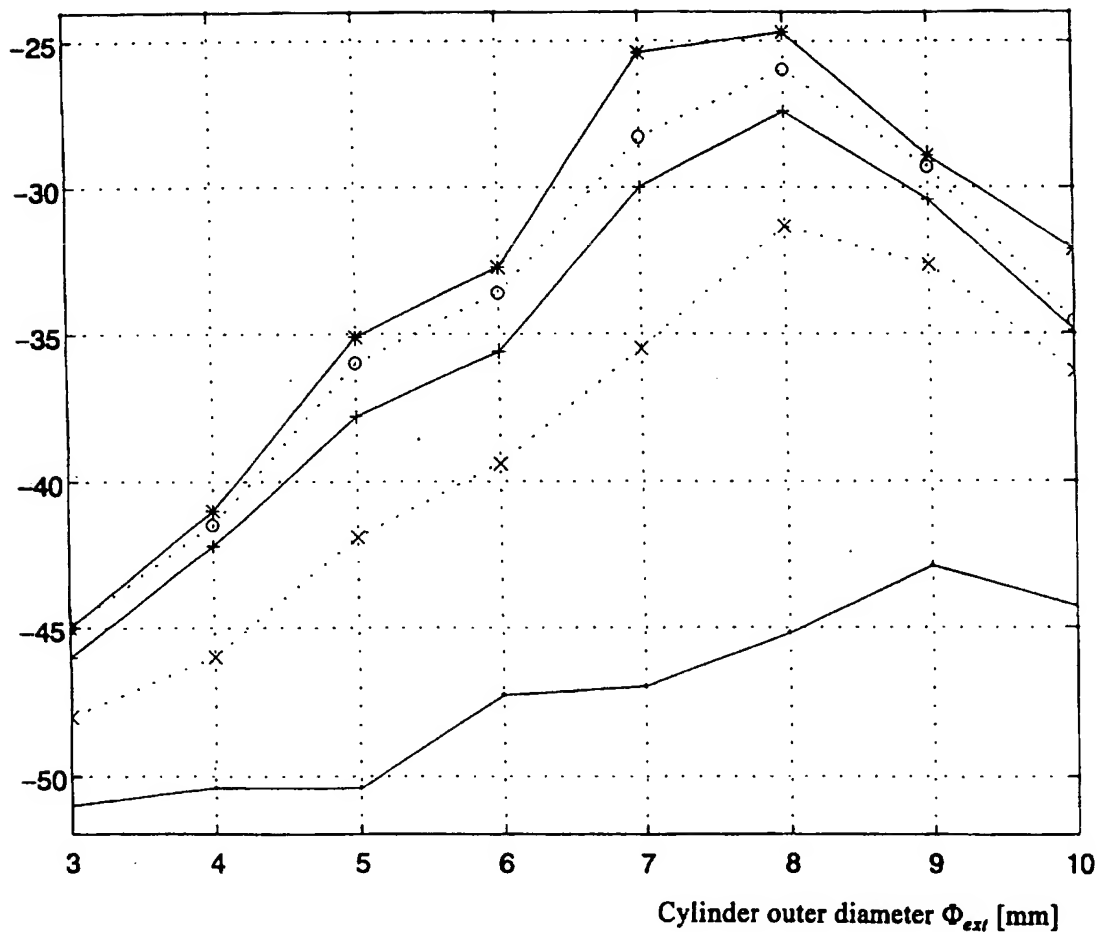


- Liquid level = 40 mm
- x Liquid level = 65 mm
- + Liquid level = 75 mm
- o Liquid level = 85 mm
- \* Liquid level = 100 mm

7/11

**Fig 7a**

Signal strength [dB]

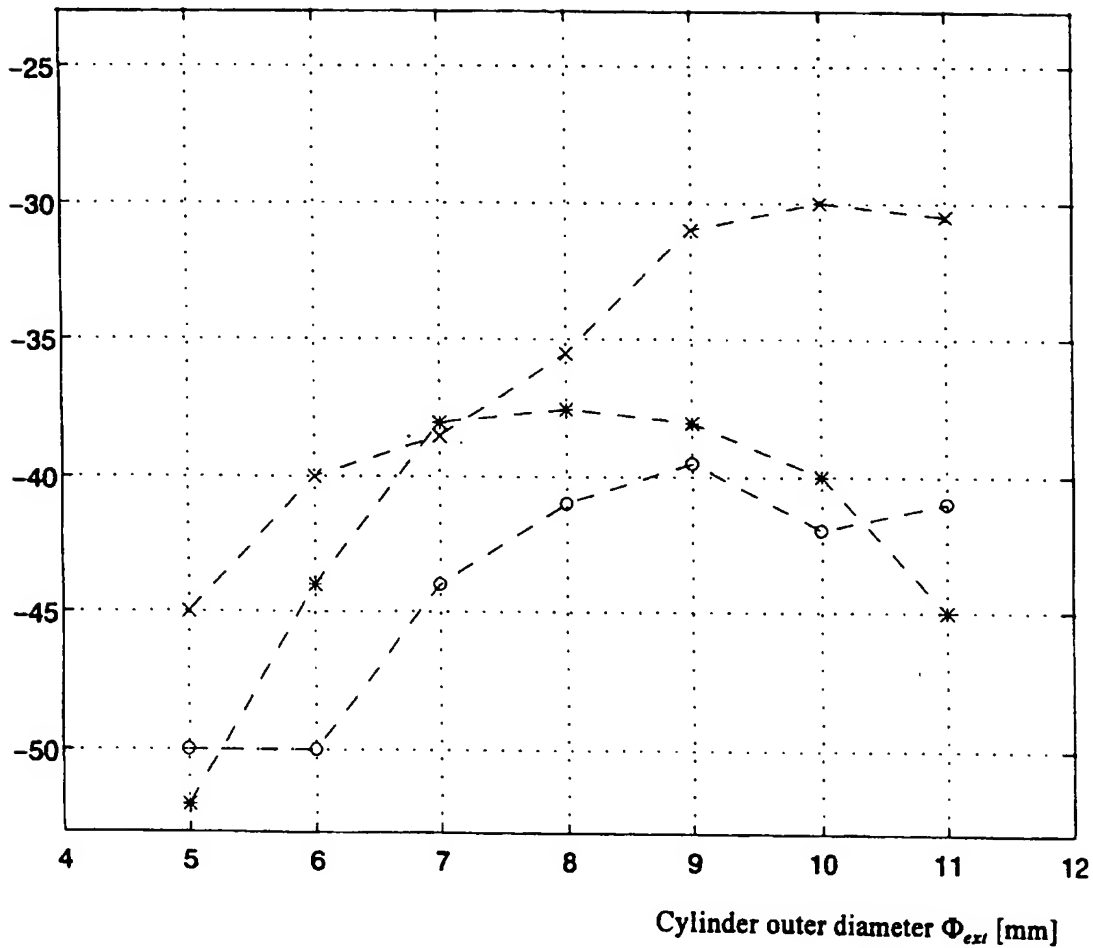


- o Excitation frequency= 617 MHz
- x Excitation frequency= 700 MHz
- \* Excitation frequency= 800 MHz

8/11

**Fig 7b**

Signal strength [dB]

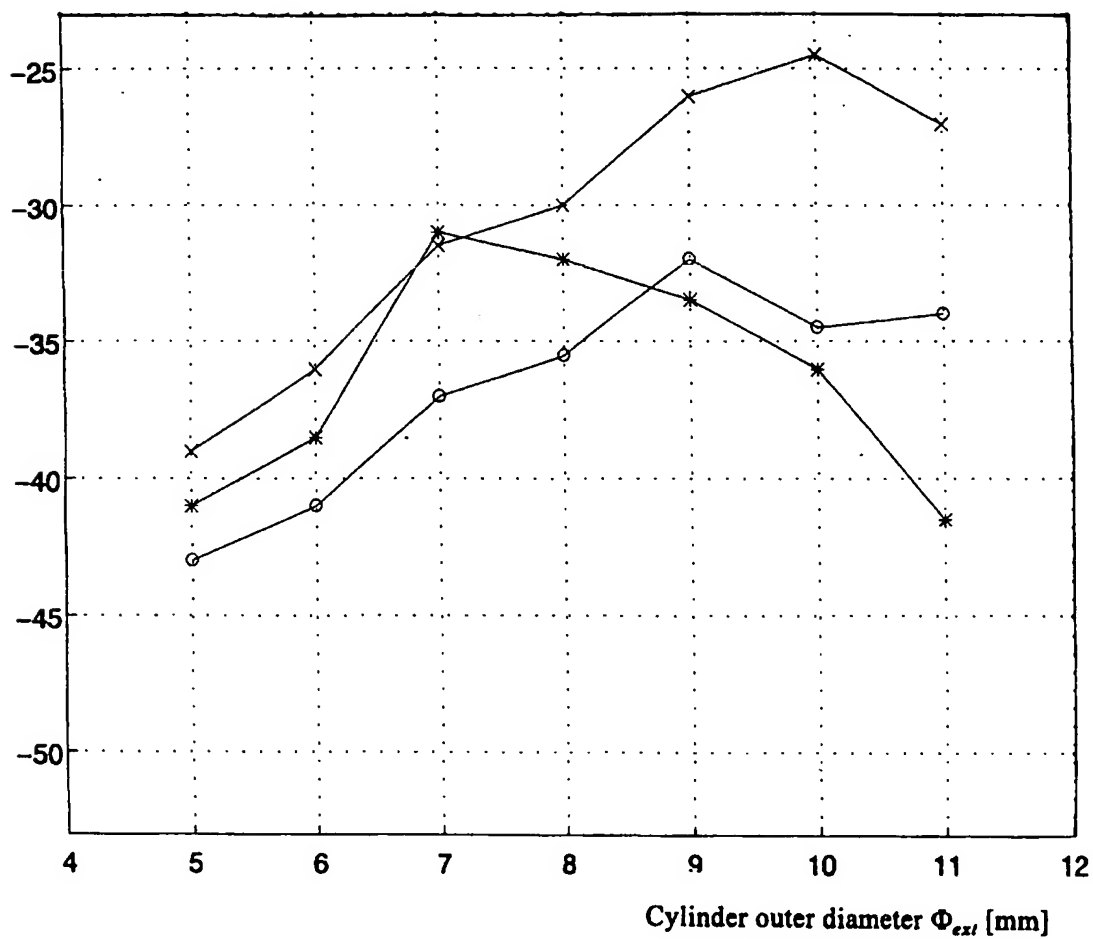


- o Excitation frequency= 617 MHz
- x Excitation frequency= 700 MHz
- \* Excitation frequency= 800 MHz

9/11


**Fig 8a**

Signal strength [dB]

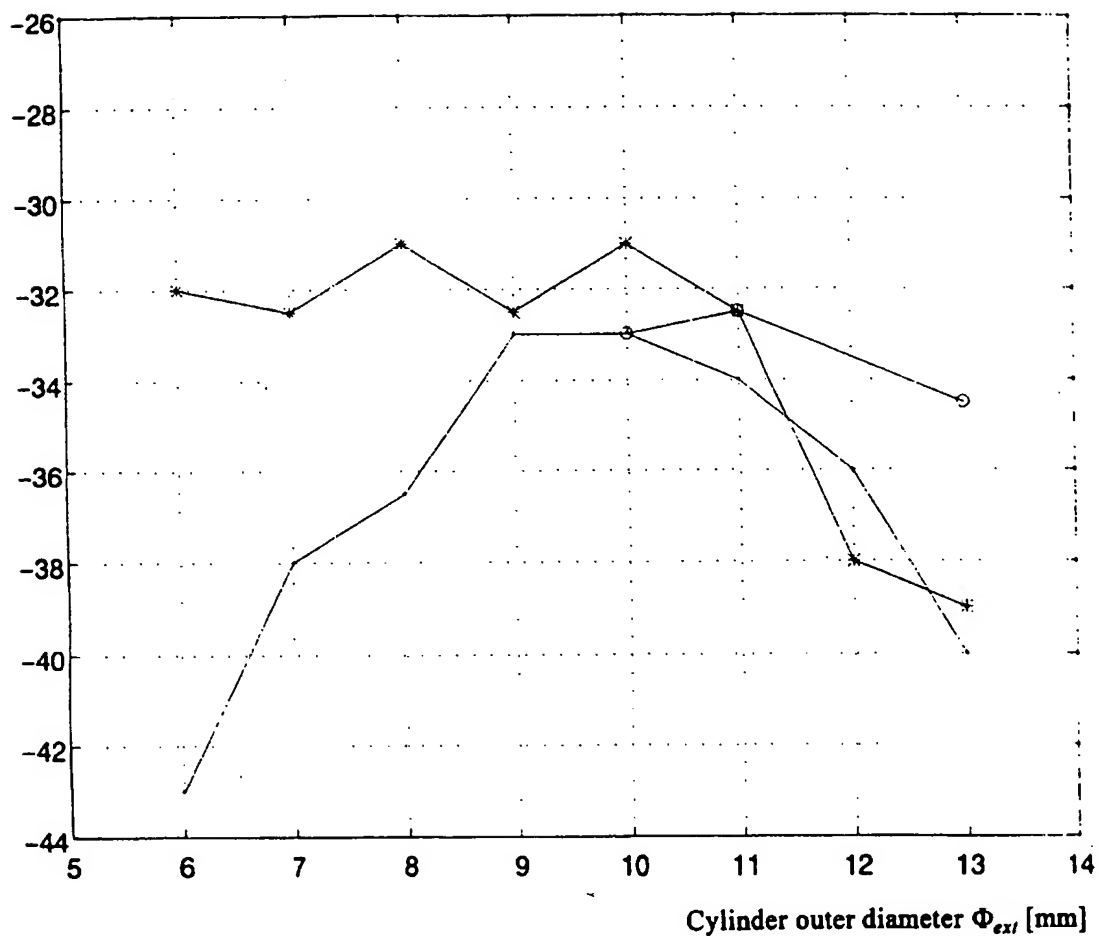

- \* Cylinder thickness = 1,0 mm
- Cylinder thickness = 1,5 mm
- o Cylinder thickness = 2,2 mm

10/11

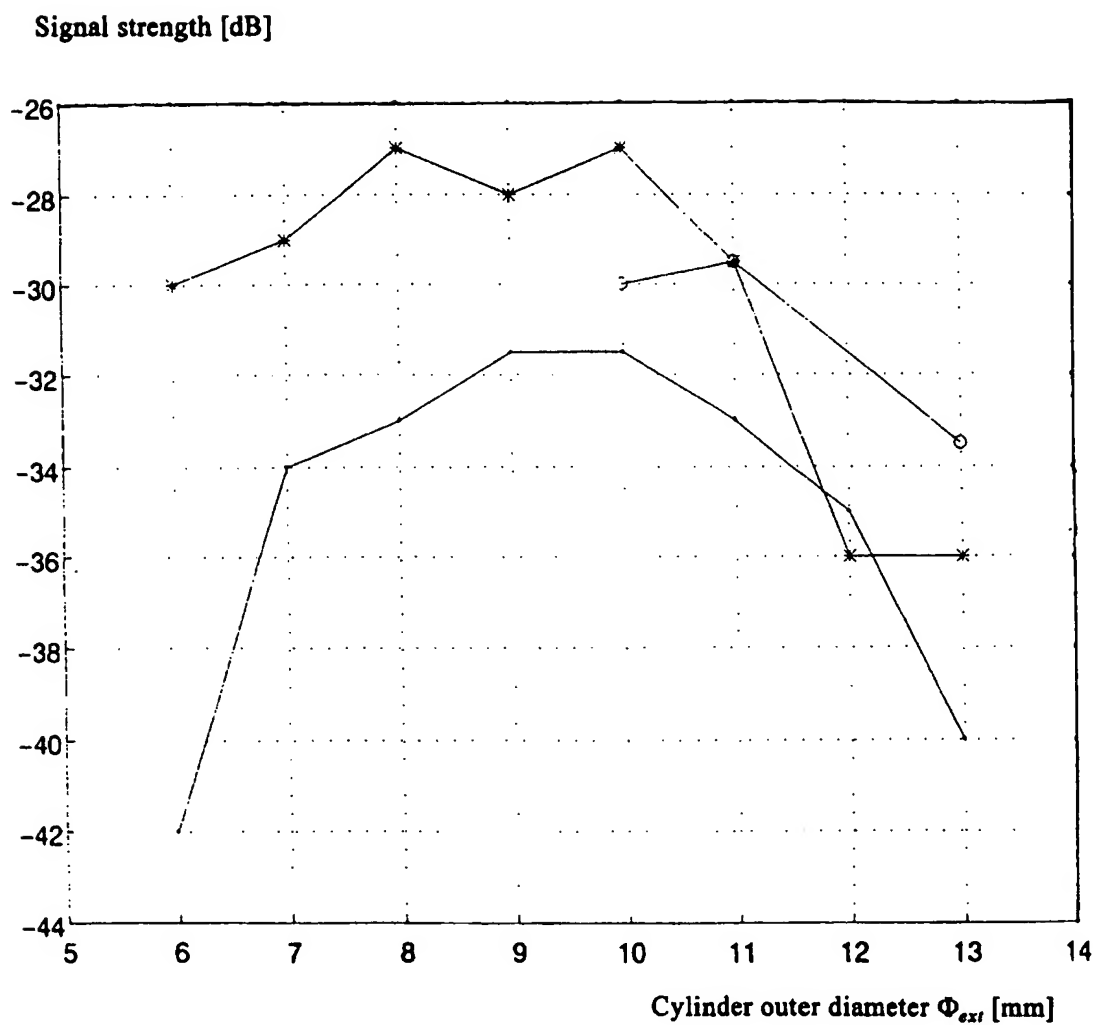**Fig 8b**

- \* Cylinder thickness = 1,0 mm
- Cylinder thickness = 1,5 mm
- o Cylinder thickness = 2,2 mm

FIG 10


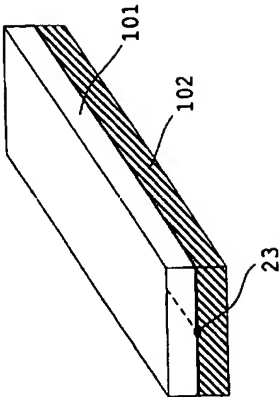


FIG 9

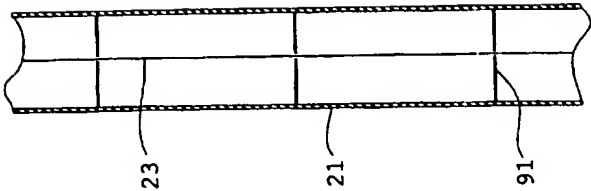

## INTERNATIONAL SEARCH REPORT

International application No.

PCT/SE 97/00198

## A. CLASSIFICATION OF SUBJECT MATTER

IPC6: G08B 13/24, G01V 3/08

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC6: G08B, G01V

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5414412 A (MING R. LIAN), 9 May 1995 (09.05.95), column 1, line 45 - column 2, line 16, figure 4 --	1-22
A	US 5469140 A (NEN-CHIN LIU ET AL), 21 November 1995 (21.11.95), abstract --	1-22
A	US 5406262 A (FRED W. HERMAN ET AL), 11 April 1995 (11.04.95), column 1, line 67 - column 3, line 25, figure 1 --	1-22

☒ Further documents are listed in the continuation of Box C.☒ See patent family annex.

## \* Special categories of cited documents:

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

\*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

\*X\* document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

\*Y\* document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

\*Z\* document member of the same patent family

Date of the actual completion of the international search

26 June 1997

Date of mailing of the international search report

30-06-1997

Name and mailing address of the ISA/  
Swedish Patent Office  
Box 5055, S-102 42 STOCKHOLM  
Facsimile No. +46 8 666 02 86

Authorized officer

Karin Säfsten  
Telephone No. +46 8 782 25 00

## INTERNATIONAL SEARCH REPORT

International application No.

PCT/SE 97/00198

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	<p>Journal of Materials Engineering and Performance, Volume 2, No 2, April 1993, R.C. O'Handley, "Magnetic Materials for EAS Sensors", whole article</p> <p>-- -----</p>	1-22



**INTERNATIONAL SEARCH REPORT**  
Information on patent family members

03/06/97

International application No.  
PCT/SE 97/00198

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 5414412 A	09/05/95	BR 9402423 A CA 2123864 A DE 69401998 D EP 0629982 A,B JP 7167949 A	17/01/95 17/12/94 00/00/00 21/12/94 04/07/95
US 5469140 A	21/11/95	AU 2326195 A BR 9503012 A CA 2146814 A CA 2149380 A CN 1123413 A EP 0690425 A JP 8087237 A US 5495230 A US 5568125 A ZA 9505228 A	18/01/96 25/06/96 31/12/95 31/12/95 29/05/96 03/01/96 02/04/96 27/02/96 22/10/96 02/02/96
US 5406262 A	11/04/95	NONE	